

MODELS D2002HPV5 / D2002HSSV5
2 HP SINGLE STAGE COMPRESSOR
DIRECT DRIVE



MODEL D2002HPV5



MODEL D2002HSSV5

ROLAIR STANDARD FEATURES

PUMP: ROLAIR Quality, Heavy-Duty, Single Stage, Ball Bearings, Cast-Iron Cylinder, Metal Filter/Silencer with Replaceable Filter Element, Stainless Steel Reed Valves and Splash Lubrication Ensure Longer Life.

MOTOR: 2 HP, 3400 RPM, Low Amp Draw Overload Protection with Manual Reset, 115 Volt, 60 Hz, Heavy-Duty/Industrial Grade with Ball Bearings for Greater Durability.

SPECIFICATIONS


MODEL	MOTOR HP	# OF CYLS.	CU.FT. DISPLACED	CU.FT. FREE AIR@100 PSI	TANK CAP. (GAL.)	DIMENSIONS (L X W X H)	APPROX SHIPPING WEIGHT
D2002HPV5	2	1	7.8	4.0	4.5	18" X 16" X 17"	62 lbs.
D2002HSSV5	2	1	7.8	4.0	4.3	20" X 15" X 17"	68 lbs.

STANDARD EQUIPMENT

- Square D Pressure Switch with On/Off Lever
- Air Line Regulator and Pressure Gauge
- Universal Quick Disconnect with Plug
- 110/135 PSI Operating Pressure
- Factory Tested
- 14.2 Amp Motor
- Safety Relief Valve
- 12 oz. Crankcase Pre-Filled with Oil



ROLAIR SYSTEMS
 606 S. LAKE ST, P O BOX 346, HUSTISFORD WI 53034-0346
 SALES FAX: 920.349.3691 - SERVICE FAX: 920.349.8861
 PHONE: 920-349-3281
www.rolair.com

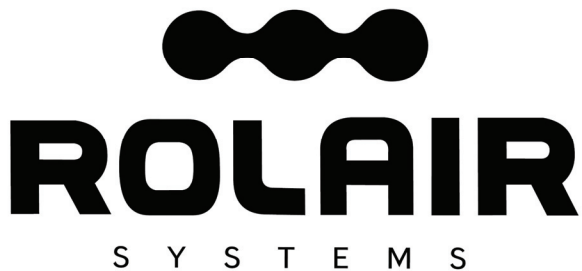

MODELS D1500HS3 / D1500HPV5
2 HP SINGLE STAGE COMPRESSOR
DIRECT DRIVE



MODEL D1500HS3



MODEL D1500HPV5

ROLAIR STANDARD FEATURES

PUMP: ROLAIR Quality, Heavy-Duty, Single Stage, Ball Bearings, Cast-Iron Cylinder, Metal Filter/Silencer with Replaceable Filter Element, Stainless Steel Reed Valves and Splash Lubrication Ensure Longer Life.

MOTOR: 2 HP, 3400 RPM, Overload Protection with Manual Reset, 115 Volt, 60 Hz, Heavy-Duty/Industrial Grade with Ball Bearings for Greater Durability.

SPECIFICATIONS

MODEL	MOTOR HP	# OF CYLS.	CU.FT. DISPLACED	CU.FT. FREE AIR@100 PSI	TANK CAP. (GAL.)	DIMENSIONS (L X W X H)	APPROX. SHIPPING WEIGHT
D1500HS3**	2	1	7.8	4.3	2.5	21" X 9" X 19"	51 lbs.
D1500HPV5	2	1	7.8	4.3	4.5	18" X 16" X 17"	62 lbs.

STANDARD EQUIPMENT

- Square D Pressure Switch with On/Off Lever
- Air Line Regulator and Pressure Gauge
- Universal Quick Disconnect with Plug
- 110/135 PSI Operating Pressure
- Factory Tested
- Safety Relief Valve
- 4 oz. Crankcase Pre-Filled with Oil
- 14.7 Amp Motor

****DESIGNED TO ALLOW COMPRESSOR TO LAY HORIZONTALLY DURING TRANSPORTATION ONLY.**



ROLAIR SYSTEMS
 606 S. LAKE ST, P O BOX 346, HUSTISFORD WI 53034-0346
 SALES FAX: 920.349.3691 - SERVICE FAX: 920.349.8861
 PHONE: 920-349-3281
www.rolair.com